


Collar

with thread

optional komplett  
in Edelstahl

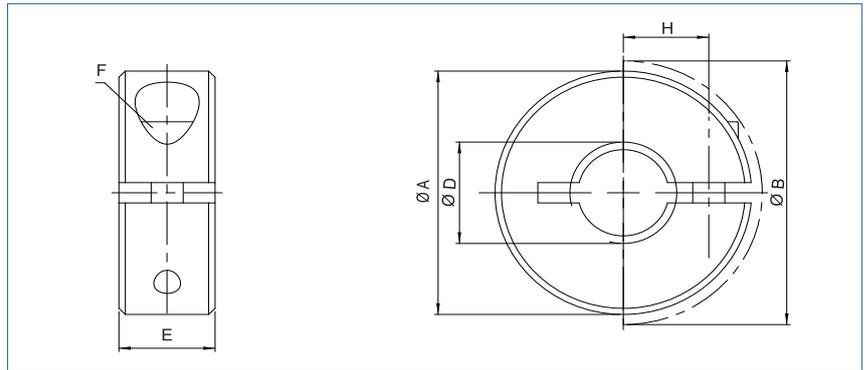

Order Code **KR-M - 24 steel blackened**  
Type Size

Order Code **KR-M-VA - 24 stainless steel**  
Type Size

Collar with thread											
Size	axial force N		Dimensions					F Screw (ISO4762)	Tightening Torque Screws Nm		Mass kg
	steel	stainless steel (VA)	Standard Bore D	A mm	H mm	E mm	B mm		steel	stainless steel (VA)	
4	1525	867	M4	16	5	9	20.7	M3x8	2	1.3	0.013
5	1525	867	M5	16	5	9	20.7	M3x8	2	1.3	0.013
6	1525	867	M6	16	5	9	20.7	M3x8	2	1.3	0.012
8	1525	867	M8	18	6	9	22.4	M3x8	2	1.3	0.015
10	1336	758	M10	24	8	9	26	M3x10	2	1.3	0.026
12	2415	1398	M12	28	9.5	11	31.8	M4x12	5	3	0.044
16	3940	2288	M16	34	12	13	39.4	M5x16	10	6	0.073
20	5540	4612	M20	40	14.5	15	47.5	M6x18	15	10	0.116
24	5236	4358	M24	45	16.5	15	50.8	M6x18	15	10	0.141
30	4809	4003	M30	54	21	15	58.6	M6x18	15	10	0.197

<b>Bore tolerance</b>	H7
<b>Material</b>	steel blackened stainless steel blank
<b>Keyway</b>	optional acc. DIN 6885
<b>Temperature Range</b>	-40 °C ~ 175 °C